
STATE OF NORTH CAROLINA
DEPT. OF TRANSPORTATION
DIVISION OF HIGHWAYS
RALEIGH, N.C. HIGHWAY PAVEMENT MARKING STANDARD ALPHABET AND **SYMBOLS** (USDOT-FHWA) FOR

PAVEMENT MARKINGS 8

SHEET 6 OF 7

1205.08

ENGLISH STANDARD DRAWING

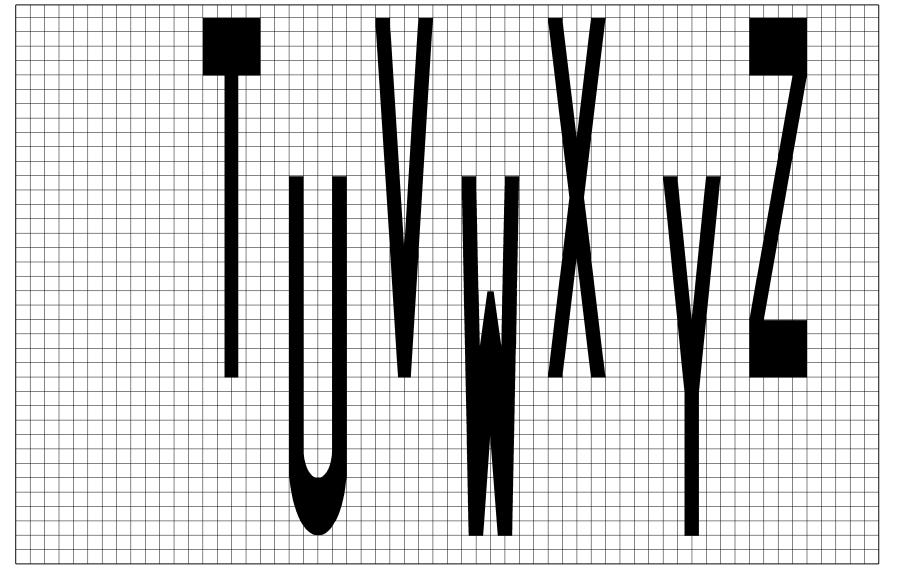

GENERAL NOTES:

- 1- STANDARD CHARACTERS ARE 25 GRID UNITS HIGH AND 4 UNITS WIDE (EXCEPT LETTER "I" AND THE NUMBER "1" WHICH ARE 1 UNIT WIDE).
- 2- VERTICAL STROKES ARE 1 UNIT WIDE, HORIZONTAL STROKES ARE 4 UNITS HIGH.
- 3- SPACE 1 UNIT (MIN.) BETWEEN CHARACTERS OR AS OTHERWISE SHOWN (OPTICAL SPACING MÁY BE USED).
- 4- STANDARD CHARACTER HEIGHTS ARE 8'-4". EXCEPT FOR THE 6' RAILROAD 'R' SYMBOL AND THE TWO-LANE 10'-5" SCHOOL SYMBOL.

- 5- FOR 8'-4" HIGH CHARACTERS, THE WIDTH IS 16" (USE 4" FOR EACH GRID SQUARE)
- 6- FOR 10'-5" HIGH CHARACTERS, THE WIDTH IS 20" (USE 5" FOR EACH GRID SQUARE).
- 7- FOR 6' HIGH CHARACTERS, THE WIDTH IS $11\frac{1}{2}$ " (USE $2\frac{7}{8}$ " FOR EACH GRID SQUARE).

HIGHWAY PAVEMENT MARKING (USDOT-FHWA) FOR SYMBOLS MARKINGS AND **ALPHABET PAVEMENT** STANDARD

DEPT. OF TRANSPORTATION DIVISION OF HIGHWAYS RALEIGH, N.C.

STATI NORTH CA

FOR

STANDARD DRAWING

ENGLISH

SHEET 6 OF 7

1205.08